


**SYNTHETIC BALES OR BALE TYPE BARRIERS FOR PAVED DITCHES**

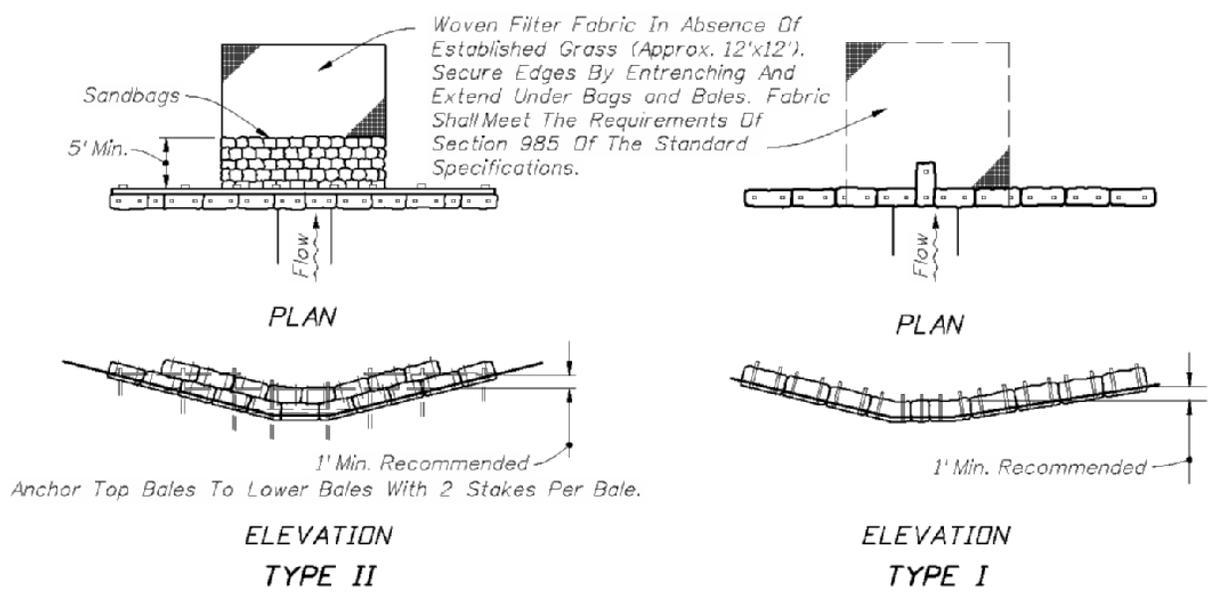

**SYNTHETIC BALES OR BALE TYPE BARRIERS FOR UNPAVED DITCHES**

**NOTES FOR SYNTHETIC BALES OR BALE TYPE BARRIERS**

1. Type I and II Synthetic Barrier should be spaced in accordance with Chart 1, Sheet 1.
2. Bales shall be anchored with 2-1" x 2" (or 1" dia.) x 4' wood stakes. Stakes of other material or shape providing equivalent strength may be used if approved by the Engineer. Stakes other than wood shall be removed upon completion of the project.
3. Rails and posts shall be 2" x 4" wood. Other materials providing equivalent strength may be used if approved by the Engineer.
4. Adjacent bales shall be butted firmly together.
5. Where used in conjunction with silt fence, bales shall be placed on the upstream side of the fence.
6. Bales to be paid for under the contract unit price for Synthetic Bales, LF. The unit price shall include the cost of filter fabric for Type I and II Barriers. Sandbags shall be paid for under the unit price for Sandbagging, CY. Rock bags to be paid for under the contract unit price for Rock Bags, EA.



**STANDARD CONSTRUCTION DETAIL  
EROSION CONTROL – SYNTHETIC BALES**

NTS

INDEX  
M-14B

DEC 2015